

DHI-ASI8223Y-A-V3

Face Recognition Terminal



- Aluminium alloy housing with wire-drawing treatment; IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- 10.1 inch LCD touch screen; resolution 1280×800
- With 2 MP wide-angle dual lens, white fill light, IR light, and WDR
- Support face and password unlock; unlock by period
- User data can be stored at the access controller; can hold 100, 000 face images and work without network
- Face-camera distance: 0.3m-2.0m
- Face verification accuracy $\geq 99.5\%$; face comparison speed $\leq 0.2s$ per person; low false recognition rate Support liveness detection
- Support Video Door Phone

Technical Specification

System

Main Processor	Embedded Processor
Network Protocol	IPv4, RTSP, RTP, TCP, UDP, P2P, SIP
OSDP Protocol	Support
Interoperability	CGI
SDK	Support

Basic

Display	10.1 inch TFT screen
Screen Type	Capacitive touch screen
Screen Resolution	1280x800
Camera	2 MP CMOS
WDR	120dB
Light Compensation	Auto whitelight fill light Auto IR fill light
Status Indicator Light	1 indicator lights. Red: Recognition failed; Green: Recognition succeeded; Blue: Standby mode
Voice Prompt	Support
Housing Material	PC+ABS; Aluminum alloy frame

Function

Unlock Mode	Password/Face unlock password, and face combination unlock
Period List	128
Holiday Period	128

First-card Unlock	Support
Remote Verification	Support
Peripheral Card Reader	1 RS-485, 1 Wiegand
Multi-card Unlock	Support
Real-time Surveillance	Support
Web Configuration	Support
Face Recognition Range	Face-camera distance: 0.3 m–2.0 m Human height: 0.9 m–2.4 m
Face Verification Accuracy	$\geq 99.5\%$
Face Recognition Speed	0.2s

Capacity

User Amount	100, 000
Face Amount	100, 000
Password Amount	100, 000
Storage Record Amount	100,000

Port

RS-485	1
RS-232	1
Wiegand	1 (26, 34, 66)
USB	1 USB2.0 port
Network	1 100M Ethernet port
Alarm Input	1

Alarm Output	1
Alarm Linkage	Support
Unlock Button	2
Door Lock Control	2


Alarm

Anti-passback	Support
Tamper	Support
Duress	Support

General

Power Supply	DC 12V 2A
Ingress Protection	IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
Power Consumption	≤24W
Dimensions	464.5mm×190.6mm×78.0mm
Operating Temperature	-30°C to +60°C (-22°F to 140°F)
Operating Humidity	5%RH-95%RH
Working Environment	Indoor and outdoor
Gross Weight	5.51kg
Installation	Desktop
Certifications	CE/FCC

Dimensions (mm[inch])

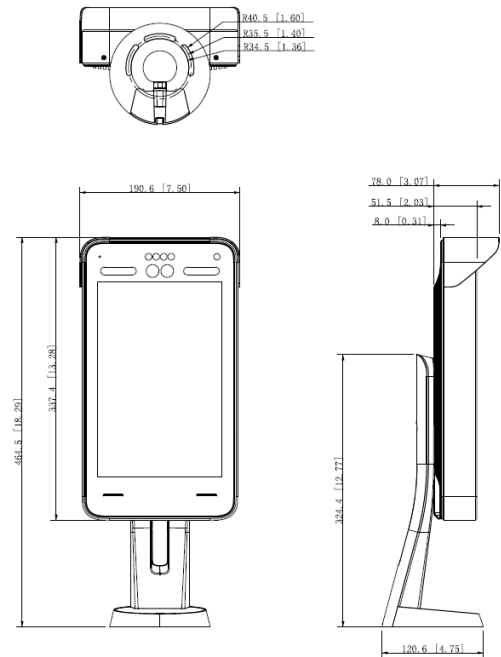

Application

